


280x280x89 mm (11.02x11.02x3.5 in)




- Frame:** Die cast aluminum
- Impeller:** Thermoplastic PBT, V-0
- Ambient Temperature Range:** -20°C ~ +80°C
- Operating Voltage Range:** Rated Voltage ±10%
- Bearing:** Ball
- Motor protection:** Thermally Protected (Auto Restart)
- Termination:** Lead wire
- Package:** 3850g / PC,

AC Axial Fan

Dimension (units: mm)

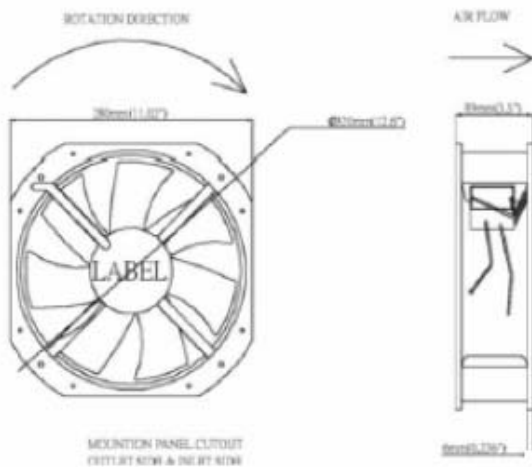

Characteristic Curves

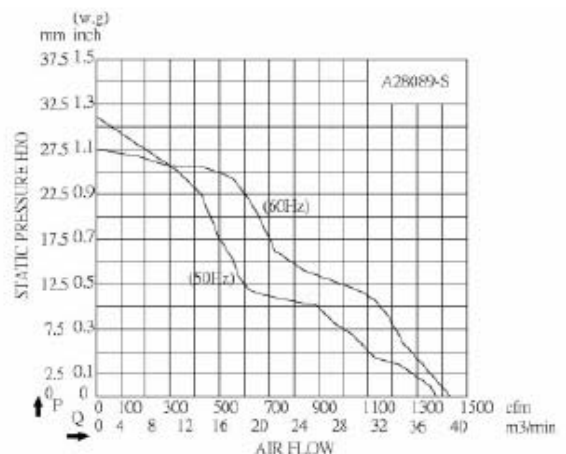

SPECIFICATION

Model	Safety Std.	Voltage (V)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Noise (dB)
CY12889HBL	UL,CE,TUV	115	50/60	1.8/2.5	180/260	2800/3250	1320/1450	37.35/41.03	74/70
CY22889HBL	UL,CE,TUV	230	50/60	0.78/1.2	180/260	2800/3250	1320/1450	37.35/41.03	74/70



風速達科技有限公司

電話：07-3634386
傳真：07-3631283
行動：0929-045065

電郵：sales@fanmotor.com.tw
網址：www.fanmotor.com.tw
地址：(81147)高雄市楠梓區盛昌街23巷18號