

Stentless Pitch Series---Shaded Pole Motors (Leadwire) 無支架孔距系列---冷櫃電機(導線式)

Instructions for use: (使用說明:)


Protection class: IP42 (防護等級:IP42)

Insulation Class: B Class (絕緣等級:B級)

Ambient temperature: -30°C~50°C (使用環境溫度:-30°C~50°C)

Application: (應用範圍:)

- FAN ϕ 200 360~500 m³ / h
- ϕ 230 480~680 m³ / h
- ϕ 254 700~1050 m³ / h
- ϕ 300 1100~1500 m³ / h

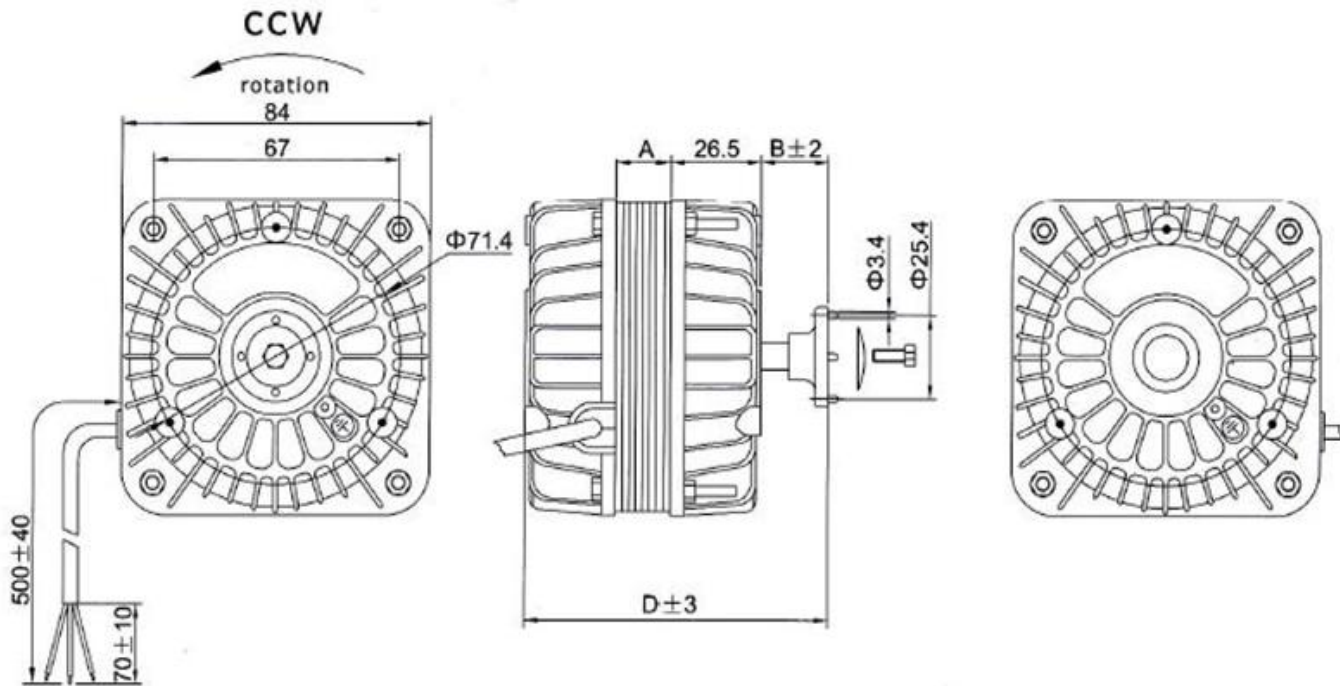

TYPE 型號	VOLTAGE 額定電壓 V	FREQUENCY 頻率 Hz	RATED INPUT 額定功率 W	OUTPUT 輸出功率 W	RATED CURRENT 額定電流 A	RATED SPEED 額定轉速 r/min	AIR VOLUME 額定風量 m ³ /h	FAN BLADE 風葉型號 mm	BRACKET 所配支架 mm	NET WEIGHT 淨重 Kg	A mm	B mm	C mm	D mm	E mm	LICENSE 認證
FM-5-13-00-L	220-240	50/60	33	5	0.21	1300	360	Φ 200	—	0.8	13	13	—	13	—	CE VDE CCC
FM-5-13-00-L	110-120	60	33	5	0.55	1550	430									UL
FM-7-20-00-L	220-240	50/60	38	7	0.23	1300	480	Φ 230	—	1.1	19	13	—	85	—	CE VDE CCC
FM-10-20-00-L	220-240	50/60	40	10	0.25	1300	500	Φ 230	—	1.1	19	13	—	85	—	CE VDE CCC
	110-120	60	55	10	0.80	1550	620									UL
FM-16-25-00-L	220-240	50/60	70	16	0.45	1300	880	Φ 254	—	1.4	25	17	—	92	—	CE VDE CCC
FM-25-40-00-L	220-240	50/60	95	25	0.70	1300	1250	Φ 300	—	1.8	40	18	—	112	—	CE VDE CCC
	110-120	60	100	25	1.40	1450										
FM-34-45-00-L	220-240	50/60	120	34	0.85	1300	1400	Φ 300	—	2.0	45	22	—	121	—	CE VDE CCC
	110-120	60	110	34	1.50	1450										



風速達科技有限公司

電話：07-3634386

電郵：sales@fanmotor.com.tw

傳真：07-3631283

網址：www.fanmotor.com.tw

行動：0929-045065

地址：(81147)高雄市楠梓區盛昌街23巷18號